


distance sensor
BOD 6K-RA01-S75-C

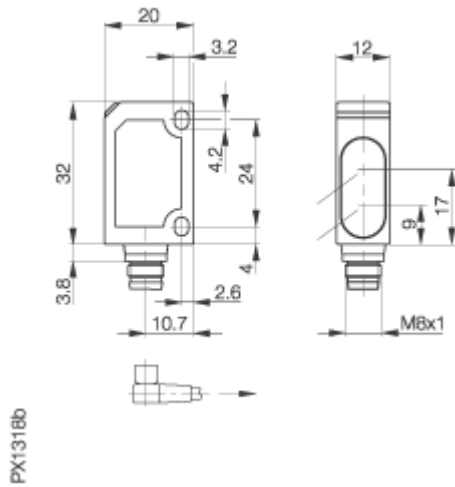


Type

Working range
 Analog output
 Ambient temperature
 Switching output
 Light source, colour
 Rated operation voltage
 Supply voltage
 No-load supply current
 light spot diameter
 Rated insulation voltage
 Short circuit protection
 Inverse-polarity protection
 power- / function indicator
 Rated operational current
 Frequency of operating cycles
 Turn on-/off time
 switching frequency
 voltage drop
 Permissible ambient light
 connection
 Weight
 material
 Connection
 Degree of protection

proximity switch, voltage analog
 output
 20...80mm
 0...10 V
 -20...+60
 PNP-logic, NO-NC selectable
 red light, 660nm
 24 V DC
 15...30 V DC
 ≤ 30mA
 5 × 5 mm bei 60 mm
 250 V AC
 yes
 yes
 green / yellow LED
 100 mA
 1000Hz
 0,5 ms
 200 Hz
 ≤ 2,4 V
 5000Lux
 M8x1
 40g
 ABS/PMMA
 Connector e.g. BKS-B 74/ 75
 IP67

Particular Characteristics
 Teach In

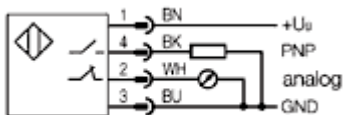

Balluff GmbH
 Postfach 1160
 73761 Neuhausen
 Telefon (07158) 173-0
 Telefax (07158) 5010
 27.07.2004 / Online-Productinformation