


Color Sensor BFS 26K-PS-L02-S115-C

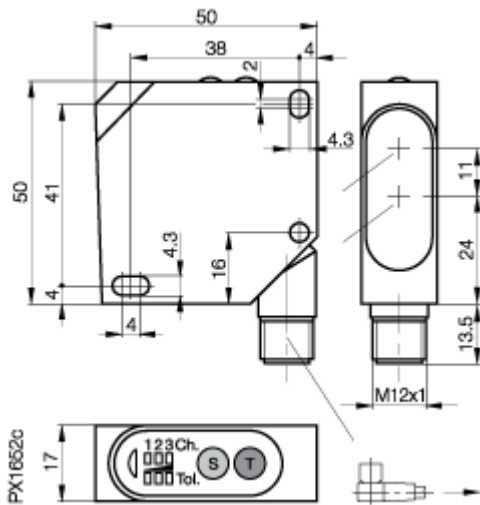

Description

Microcontroller controlled;
Various light spot geometries;
3 different colors can be distinguished at the same time;
5-stage adjustable color tolerance;
3 yellow LEDs for switching state indication;
3 red LEDs for indicating tolerance level;


Specifications

Working distance Diffuse	12...32mm
Working distance w/reflector	50...200mm
Supply voltage UB	12...28 V DC
Ambient temperature range Ta	-10...55°C
Emitter, light type	pulsed white light
Light spot geometry	square
Light spot diameter	2 x 2 mm at 22 mm range
Sensing range tolerance	±5 mm at Tol. 3
Supply voltage indication	LED green
Output function indication Ch.	3 x LED yellow
Output function indication Tol.	3 x LED red
Ripple	10 %
No-load supply current	≤ 40 mA
Output	3 x PNP
Switching type	light-on
On delay	300 ms
Frequency of operating cycles f	500 Hz
Protected against polar. reversal	yes
Short circuit protected	yes
Degree of protection	IP 67
Dimensions	50 x 50 x 17 mm
Connection	M12 connector, 8-pin, 270° rotatable
Recommended connector	BKS-S139
Housing / Lens material	Impact-resistant ABS / PMMA
Weight	40 g


Particular Characteristics

Teach-in and external Teach-in

2 Betriebsarten sind möglich:



1. Normalbetrieb



2. Externer Teach-in

Balluff

GmbH
Postfach 1160
73761 Neuhausen
Telefon (07158) 173-0
Telefax (07158) 5010